


# Delock PCI Express x16 Card to 4 x internal NVMe M.2 Key M - Bifurcation

## Description

This PCI Express card by Delock expands the PC by **four M.2 slots**. M.2 SSDs in format 2280, 2260, 2242 and 2230 can be connected. The card requires the **PCIe bifurcation** of the motherboard to split the PCIe signal in order to use multiple slots with M.2 SSDs.

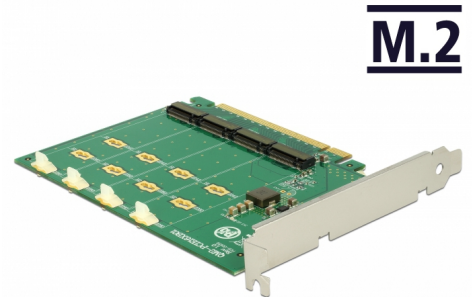

## Note

Without PCIe bifurcation only the first M.2 slot of the card can be used.

**Item no. 89835**

EAN: 4043619898350

Country of origin: Taiwan,  
Republic of China

Package: Box

## Specification

- IOI item number: QM2-PCIE16XB01
- Connectors:  
internal:  
4 x 67 pin M.2 key M slot  
1 x PCI Express x16, V4.0
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- 4 x LED indicator

## System requirements

- Linux Kernel 3.17 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64

- PC with one free PCI Express x16 / x32 slot
- Motherboard and BIOS with PCIe bifurcation support

---

## Package content

- PCI Express card

---

## Images



## General

Function:	NVM Express (NVMe)
Supported operating system:	Linux Kernel 3.17 or above Linux Kernel 4.10 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	4 x
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

## Interface

Internal:	4 x 67 pin M.2 key M slot 1 x PCI Express x16, V3.0
-----------	--

## Technical characteristics

Data transfer rate:	up to 39 Gbps
---------------------	---------------